



Passo 01: Criar um Pen Drive Bootavel com a imagem do Clonezilla (.ISO) no Rufus e depois copiar a imagem do Netbook positivo dentro desse pendrive.

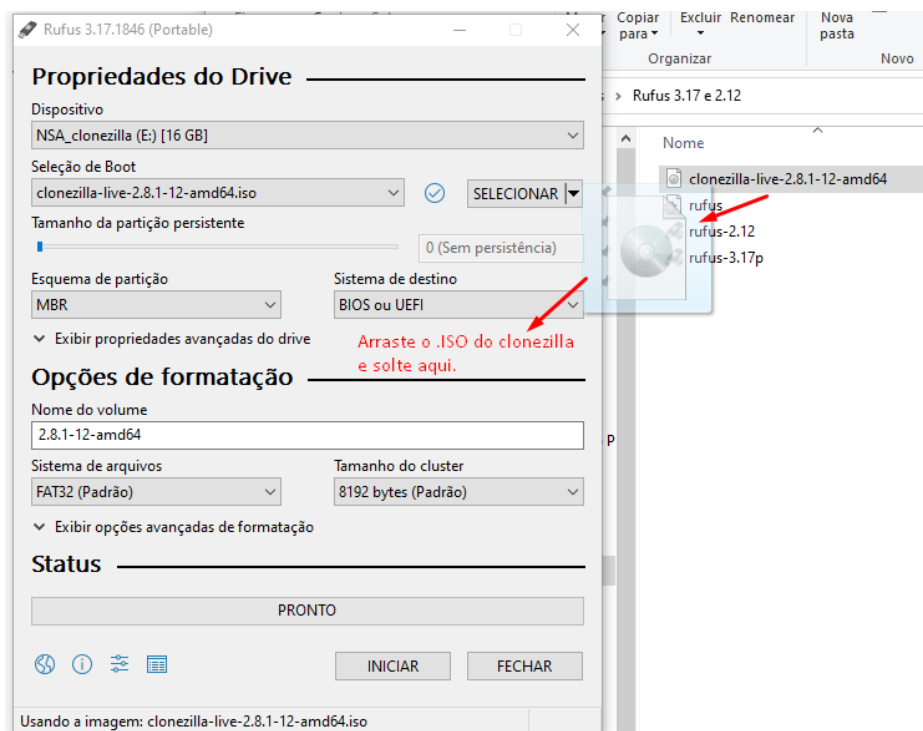

O Pen Drive deverá ficar assim:

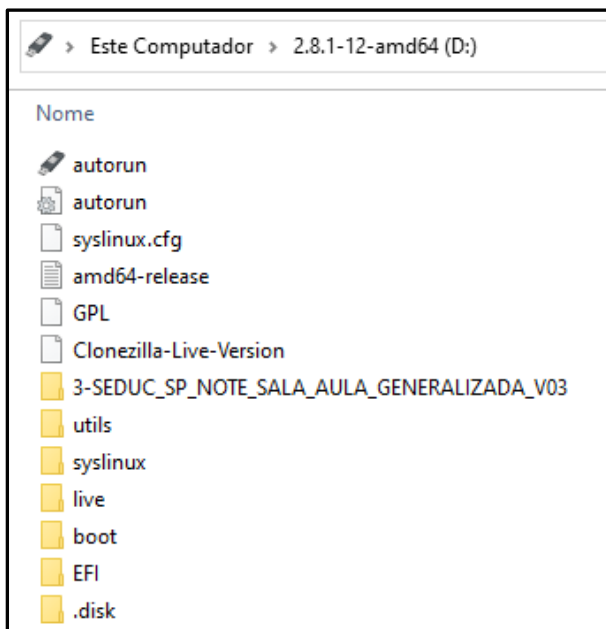


Obs: Caso não tenha a Imagem do Netbook Positivo, baixe aqui:

<https://drive.google.com/drive/folders/1WvBpg5YpLfdcFVgOA0ip2GfREUFuPpjz>


Passo 02: Coloque o Pen Drive no Netbook e pressione **F11** para escolher o Boot pelo Pen Drive (Pass: 1n0v@c@0)

Passo 03: Escolha uma das opções abaixo:

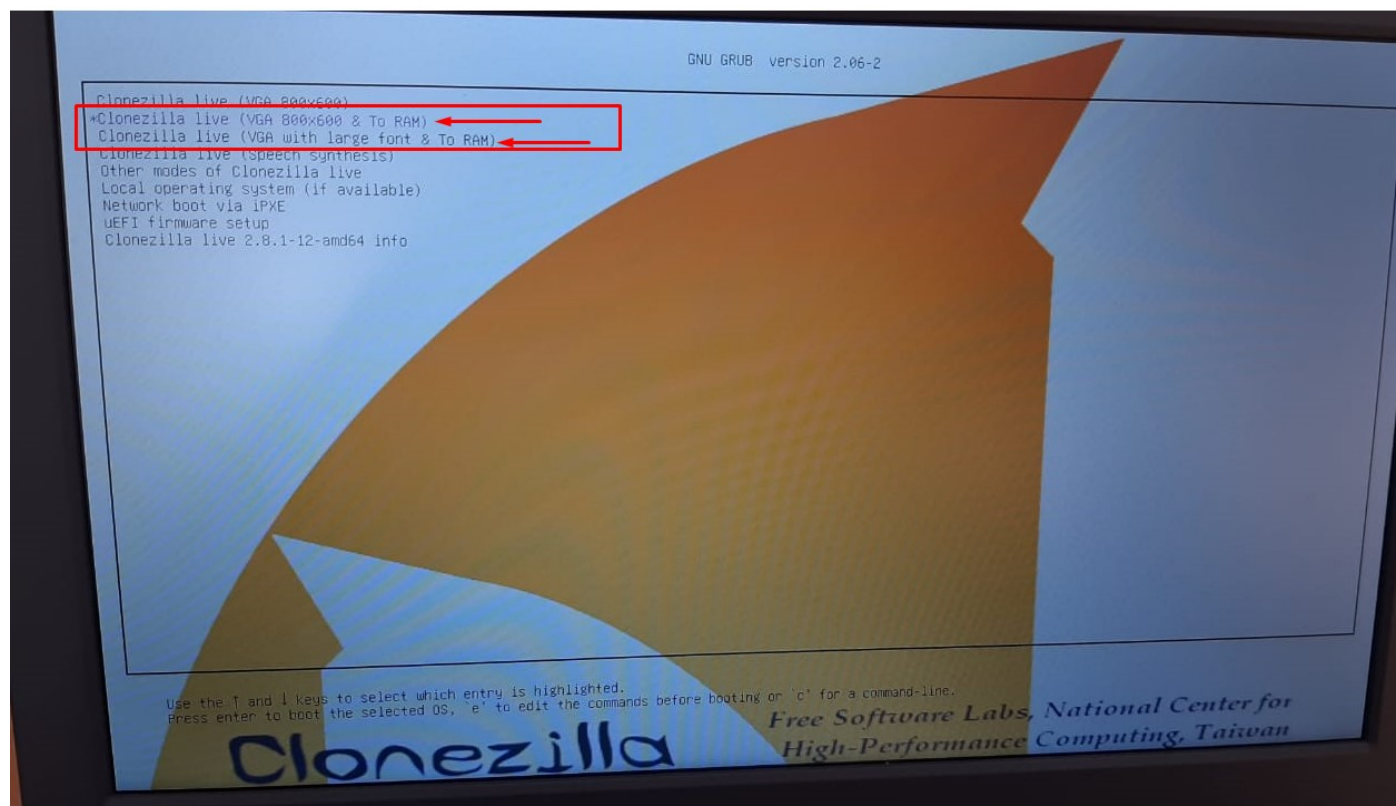


Passo 04: Escolha o Idioma:


Obs: Este tutorial foi feito com base no Idioma English.

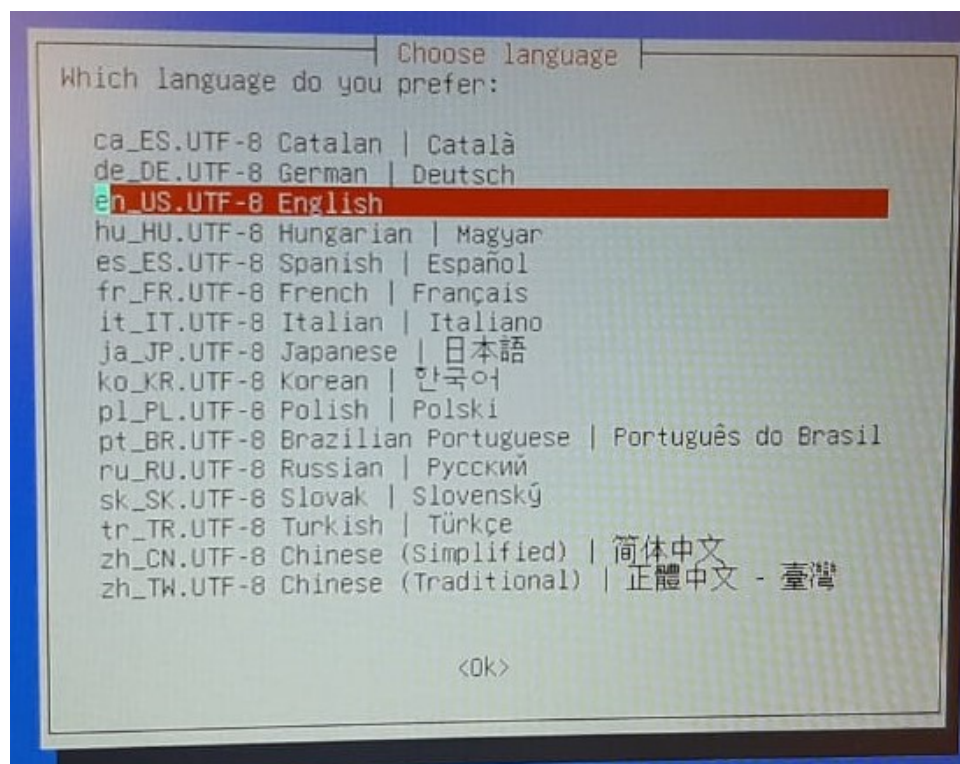


Passo 05: Tela para escolha do Teclado, neste caso, **pressione Enter**.

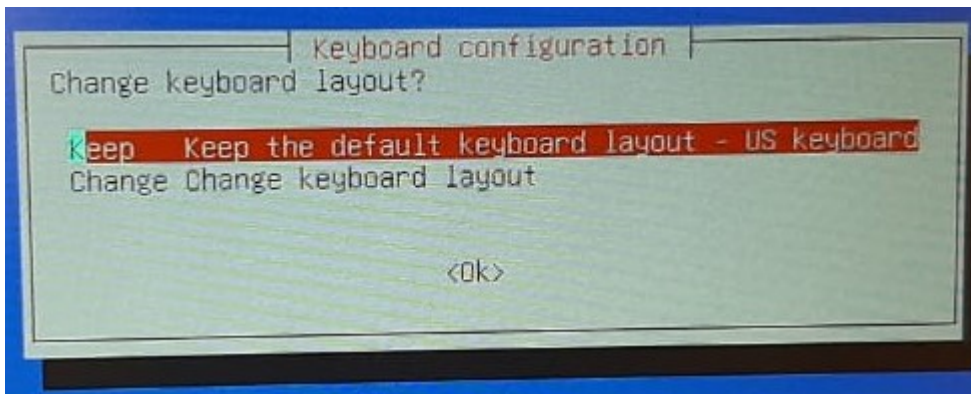


Passo 06: Pressione **Enter** para iniciar o Clonezilla.

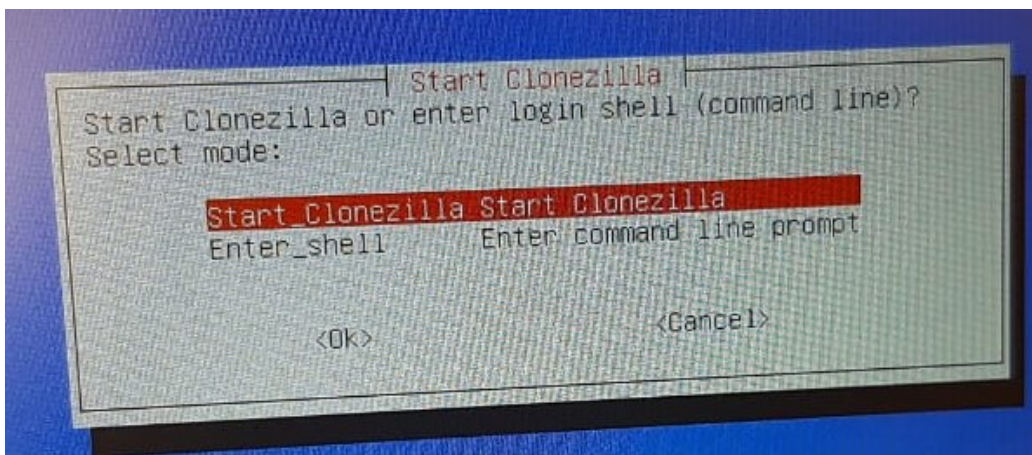


Passo 07: Pressione **Enter** em **device-image**, conforme imagem abaixo:

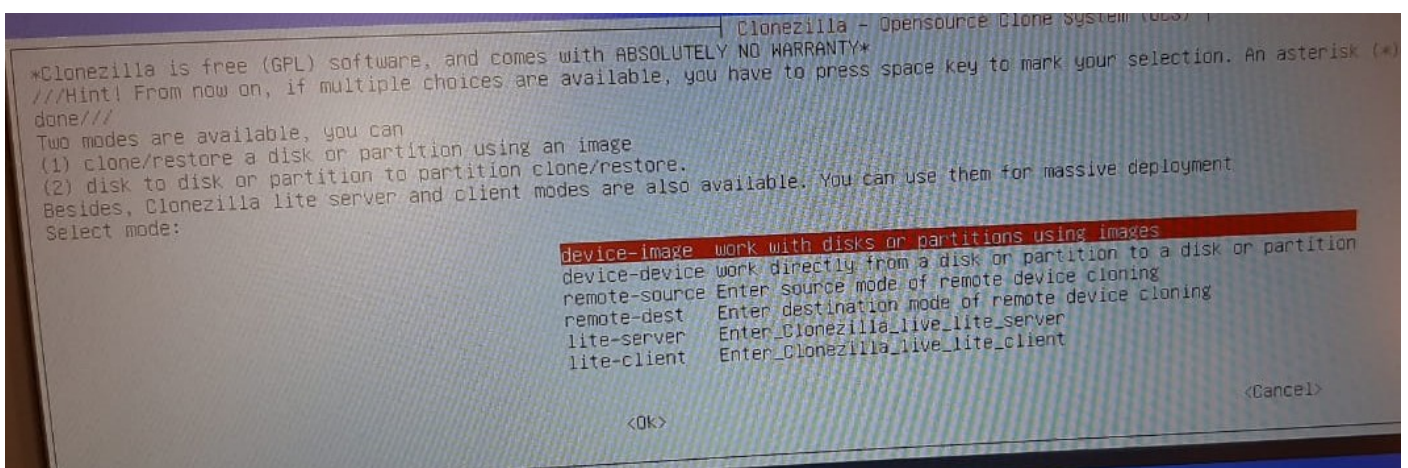


Passo 08: Pressione Enter em `local_dev`, conforme imagem abaixo:

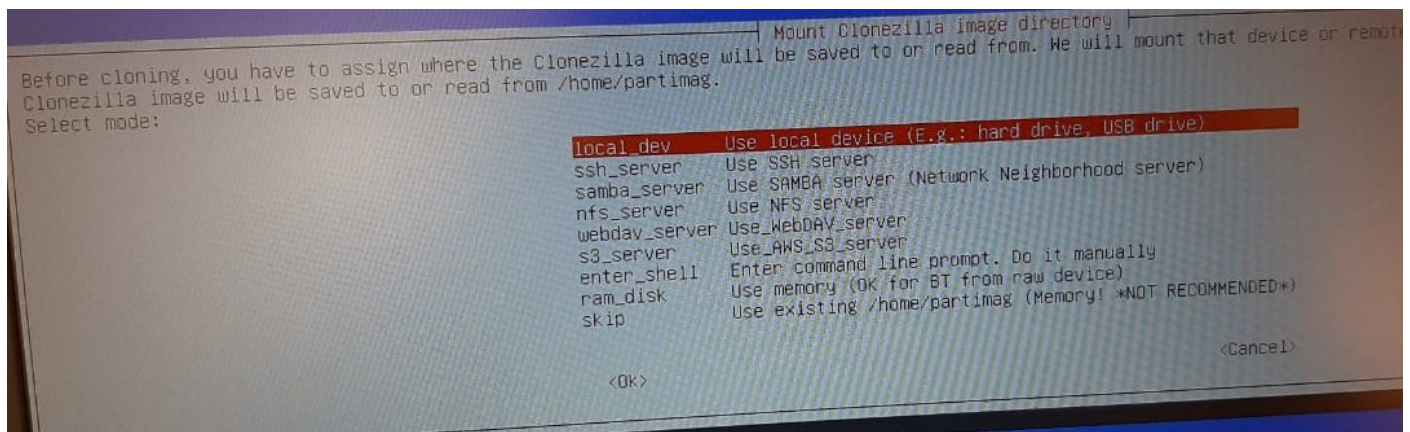


Passo 09: Pressione Enter novamente:

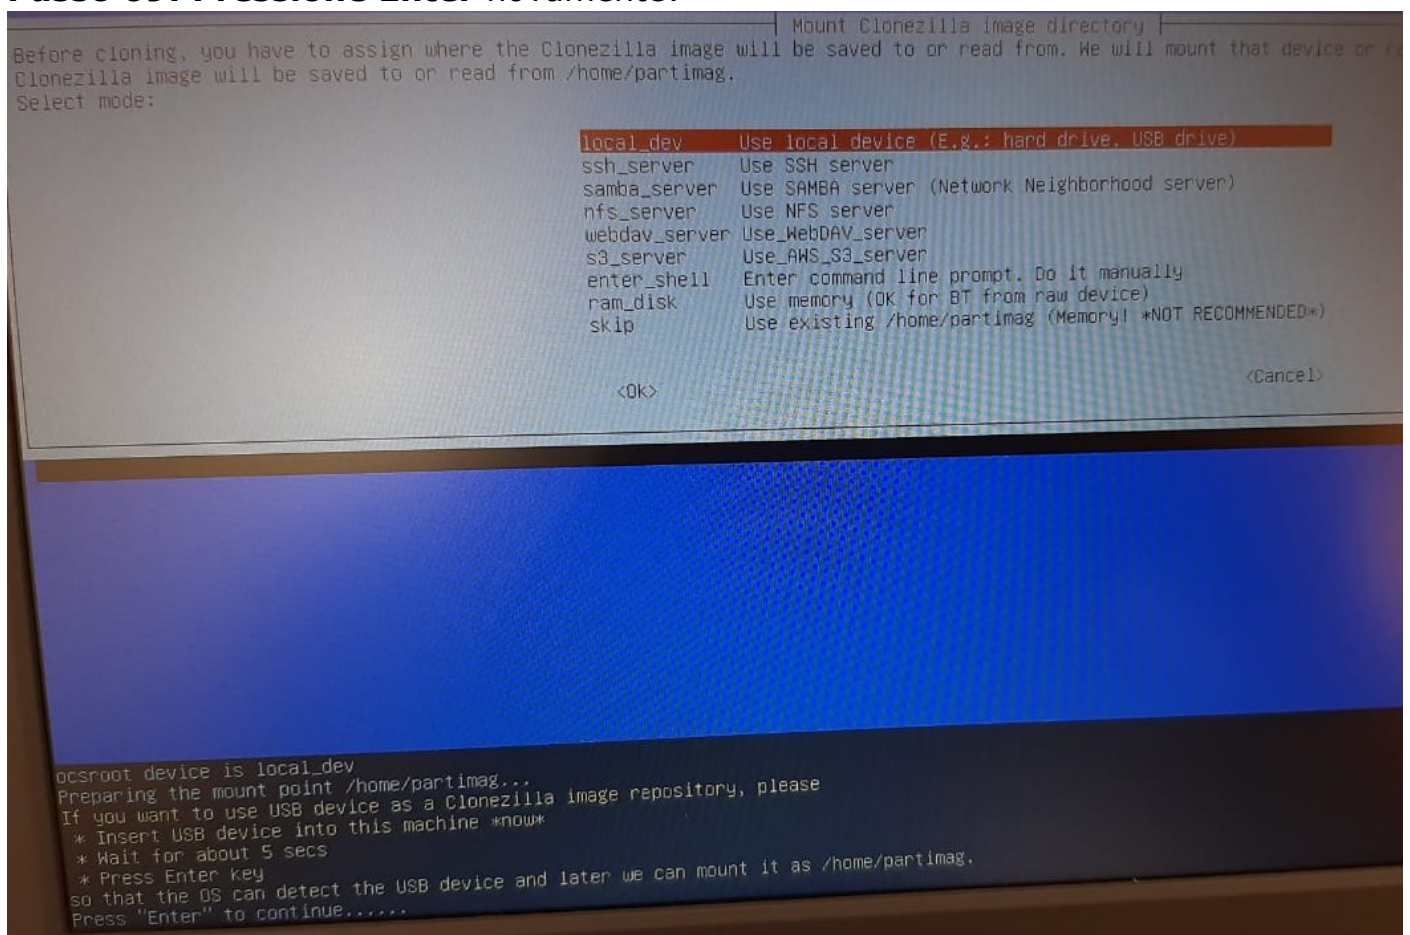


Passo 10: Nesta tela será mostrado o dispositivo de armazenamento do Netbook e o Pen Drive, **Pressione Ctrl-C** para ir para a próxima tela.

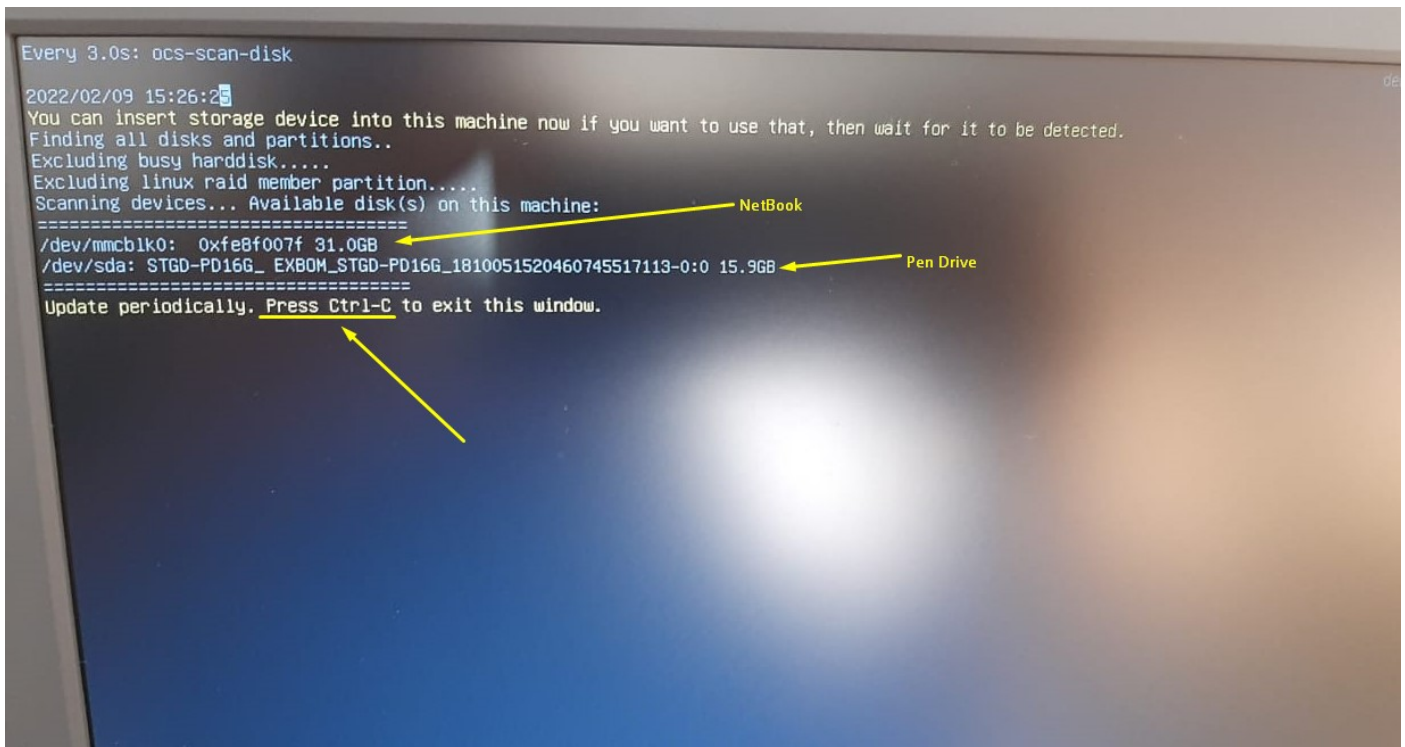

Passo 11: Selezione o Pen Drive:

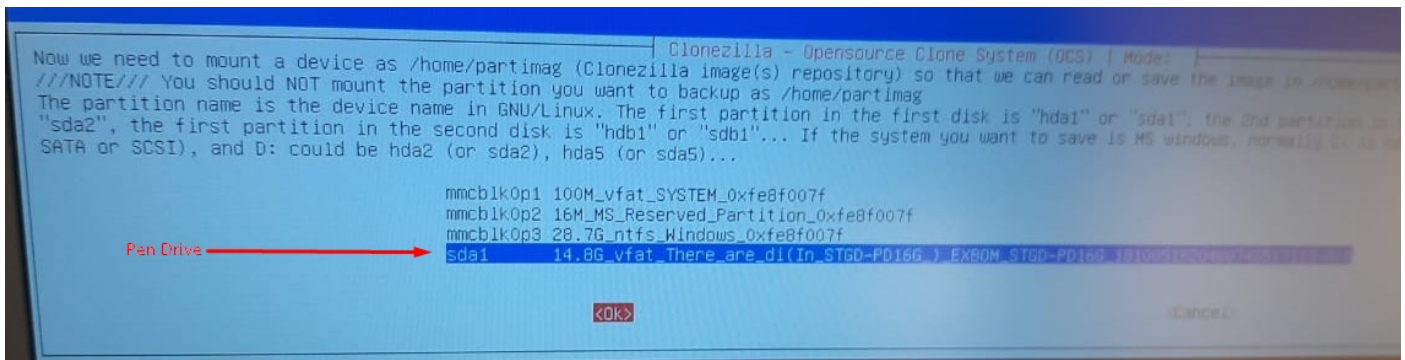


Passo 12: Pressione Enter em no-fsck:

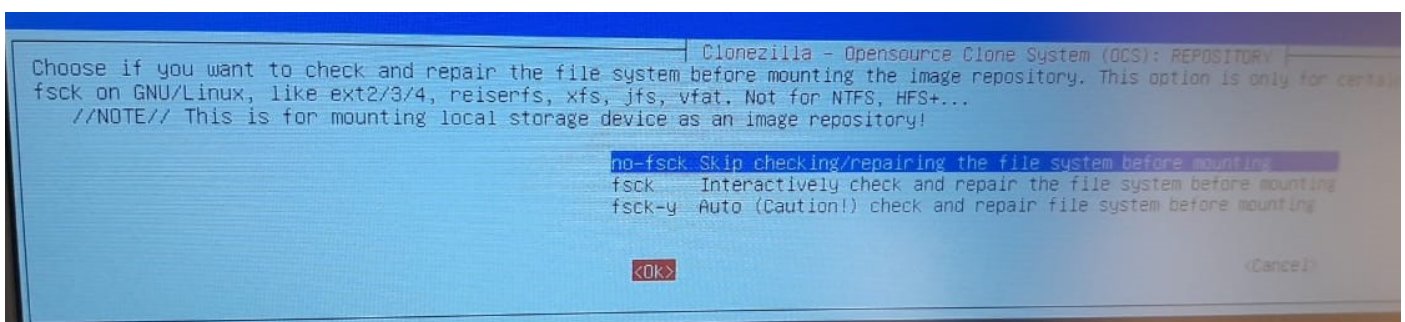


Passo 13: Selecione a pasta onde está a Imagem do Netbook:


obs: use a tecla Tab para selecionar o botão <Done> e tecle Enter:

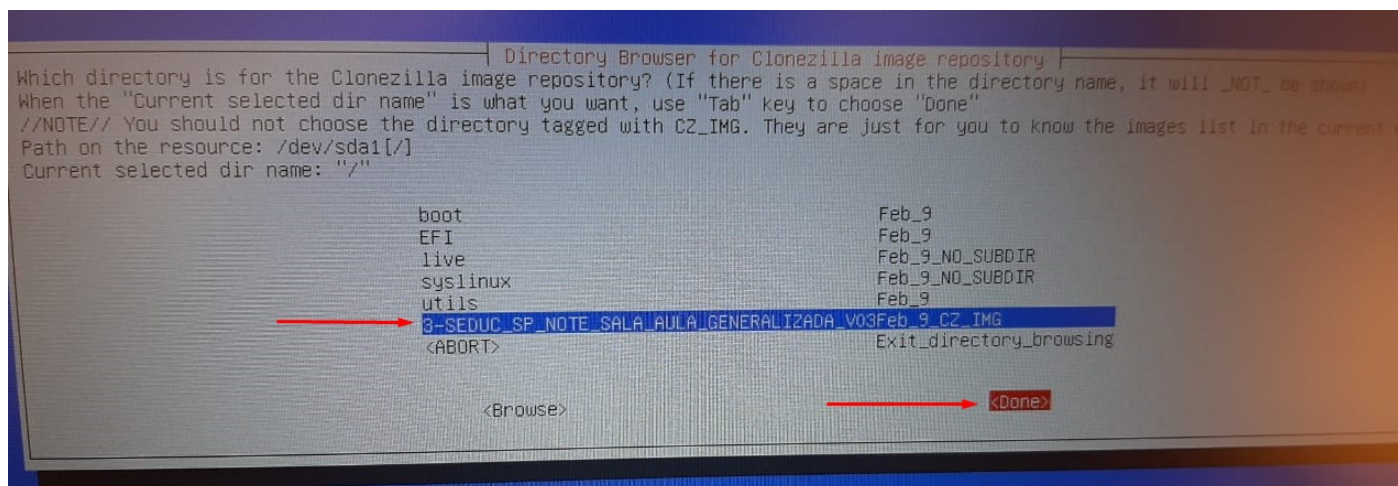


Passo 14: Pressione Enter Novamente:

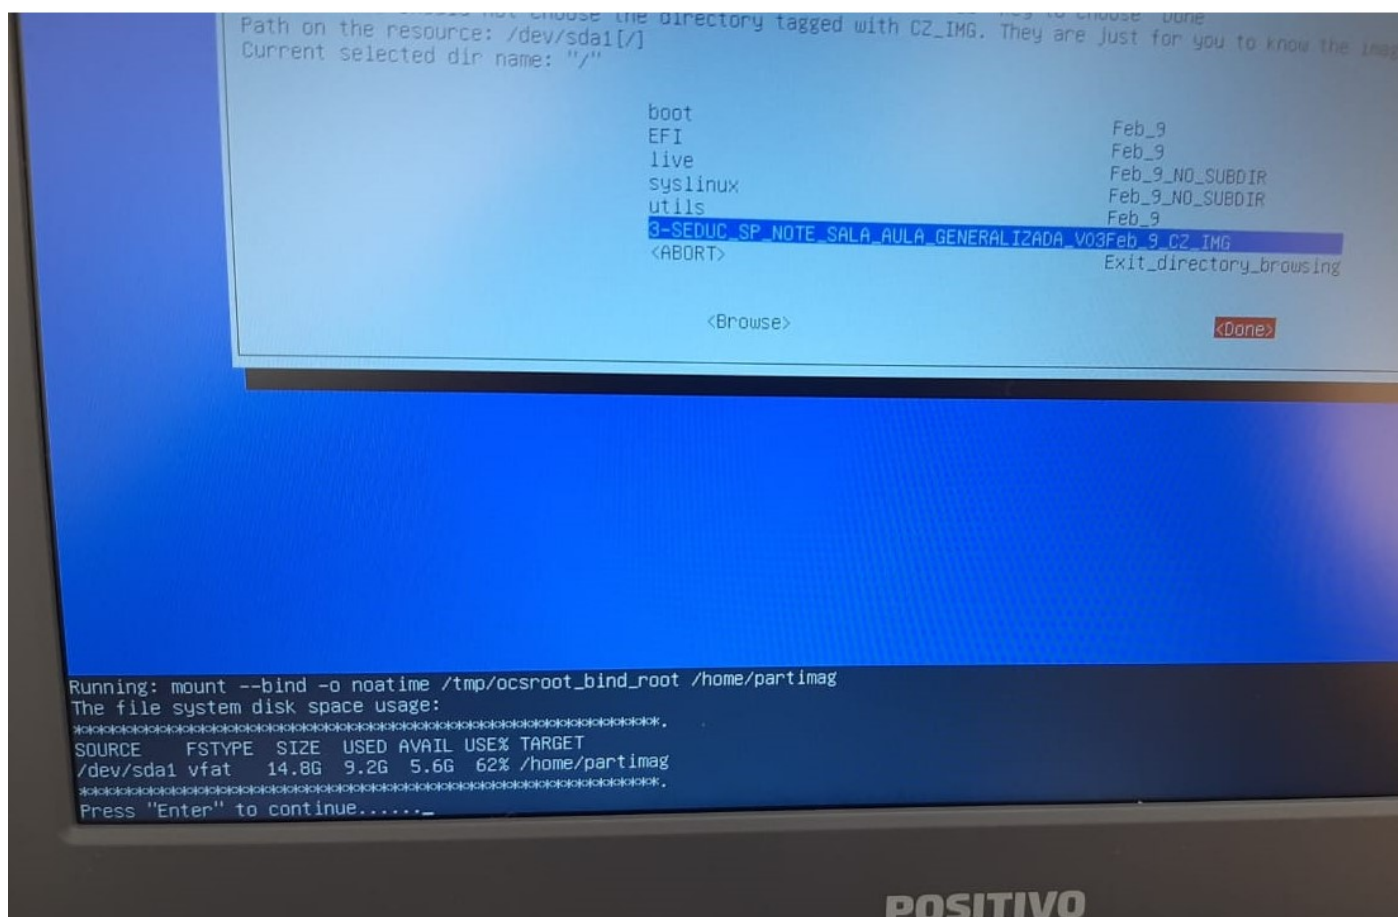


Passo 15: Escolha a opção **Expert**:

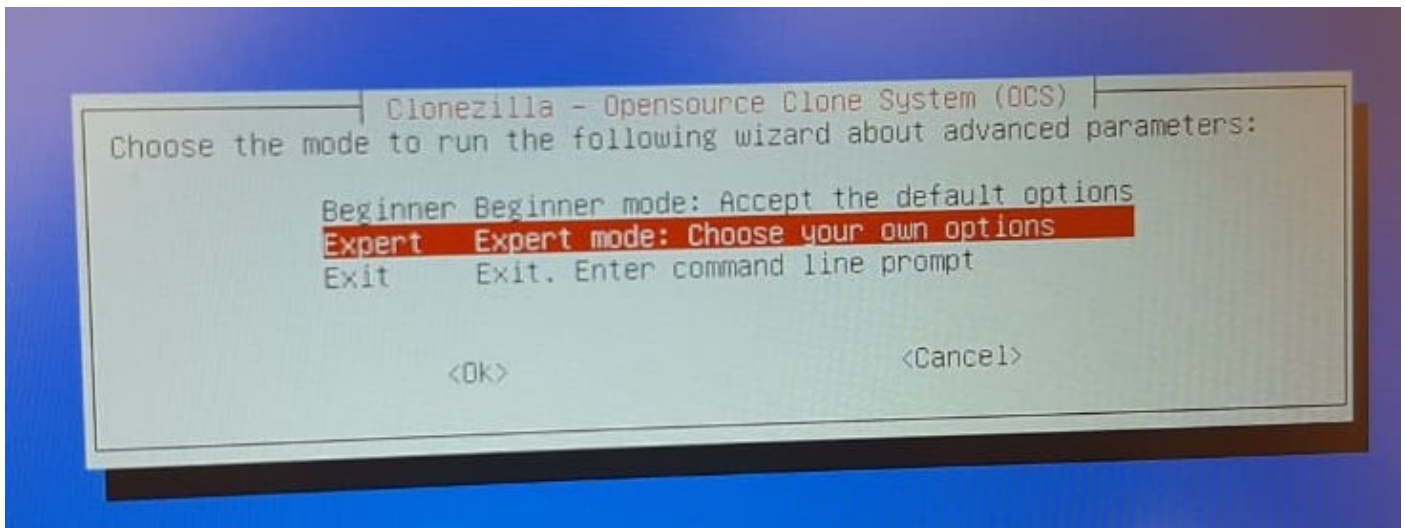


Passo 16: Escolha a terceira opção, **restoredisk**:

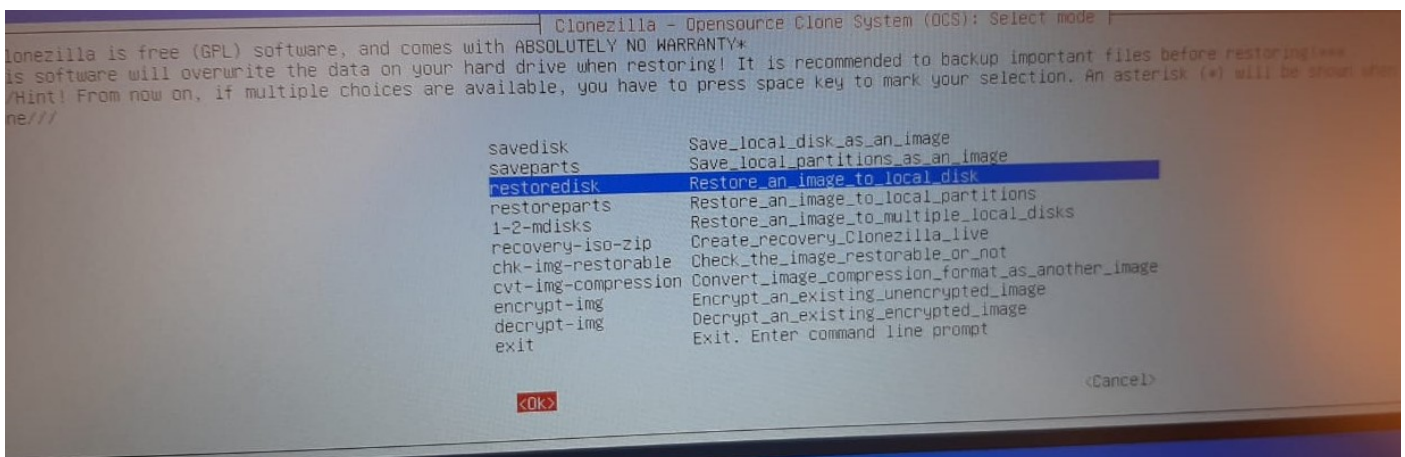


Passo 17: Seleccione ok e pressione Enter:

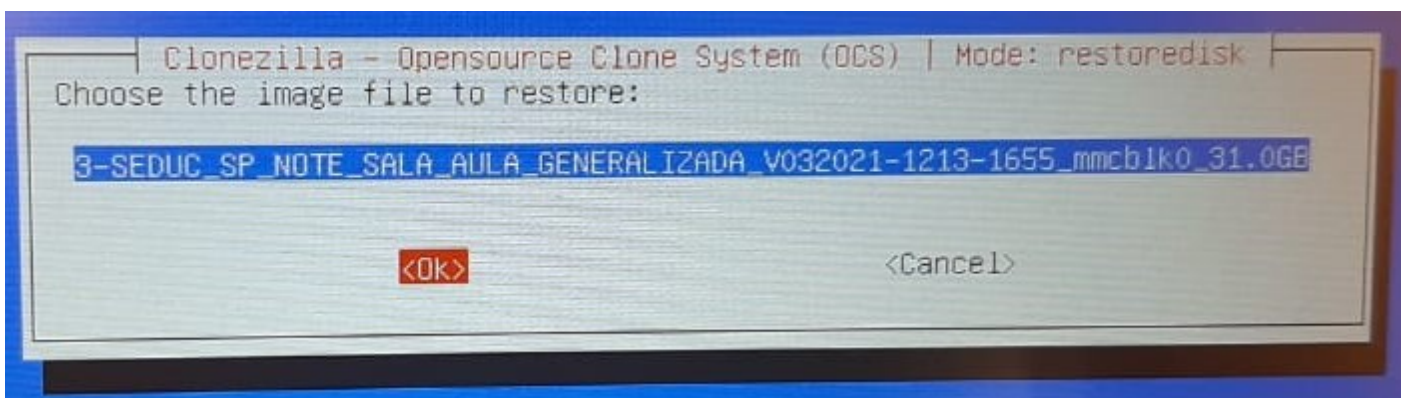


Passo 18: Seleção ok e pressão Enter:

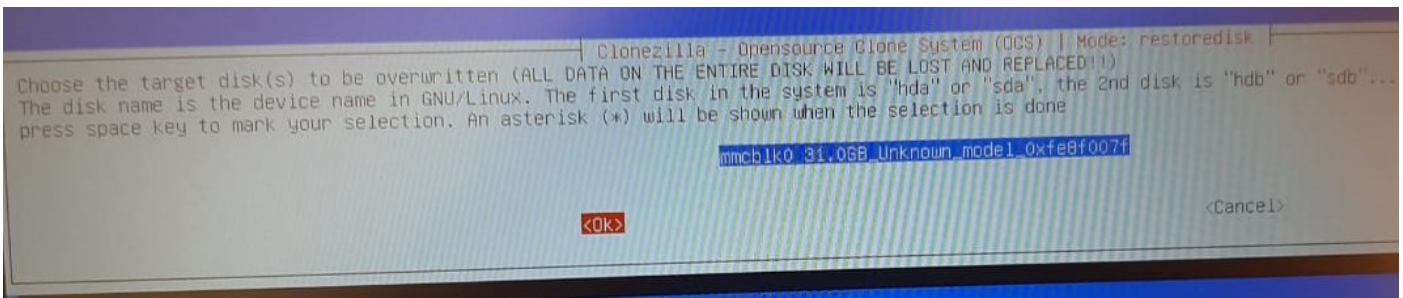


Passo 19: Seleção **icds** e pressão **barra de espaço** para inserir o **asterisco**. Pressione **Tab** para ir para o **Ok** e pressão **Enter**.

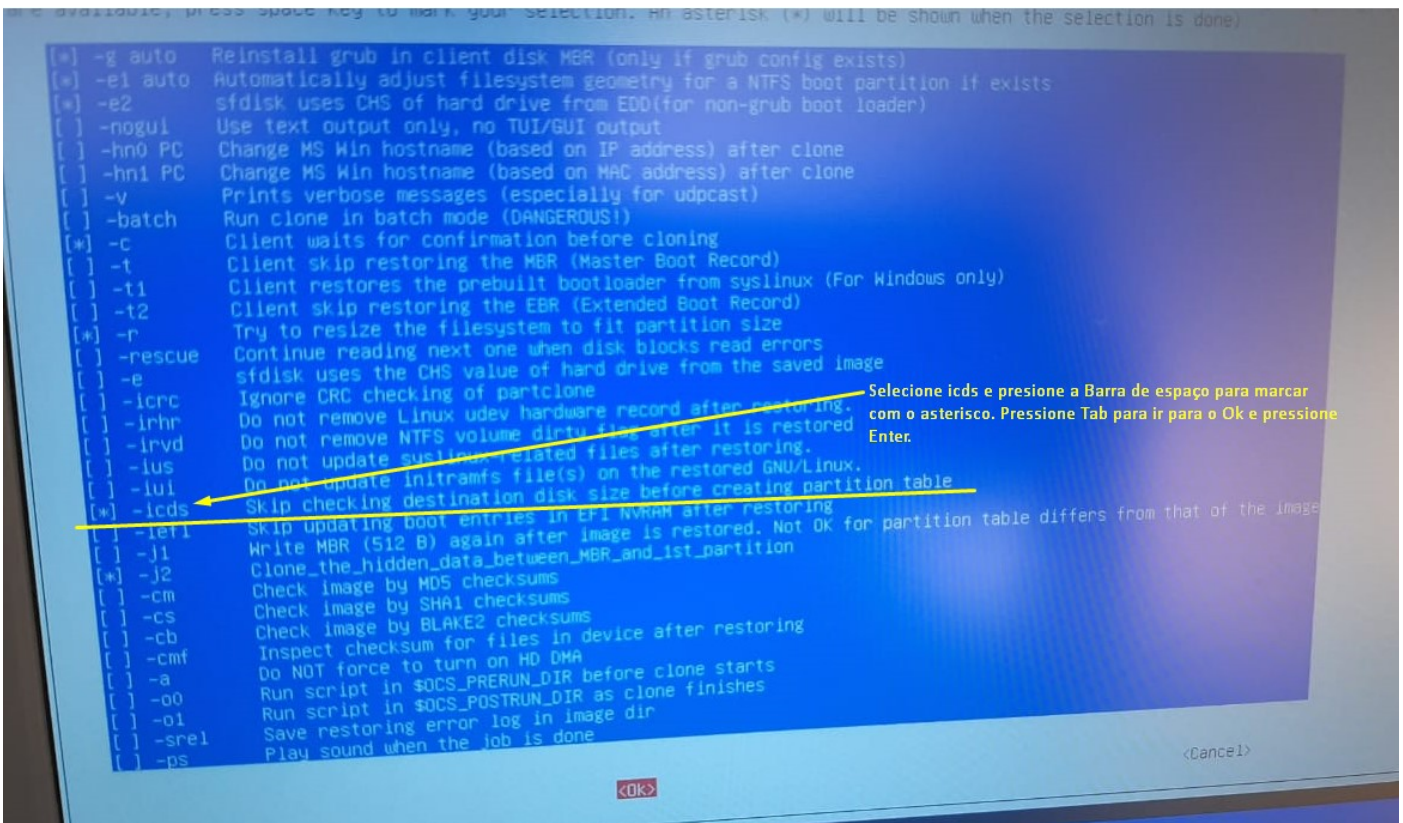


Passo 20: Seleção **-k1**, **Tab** para **Ok** e pressão **Enter**:

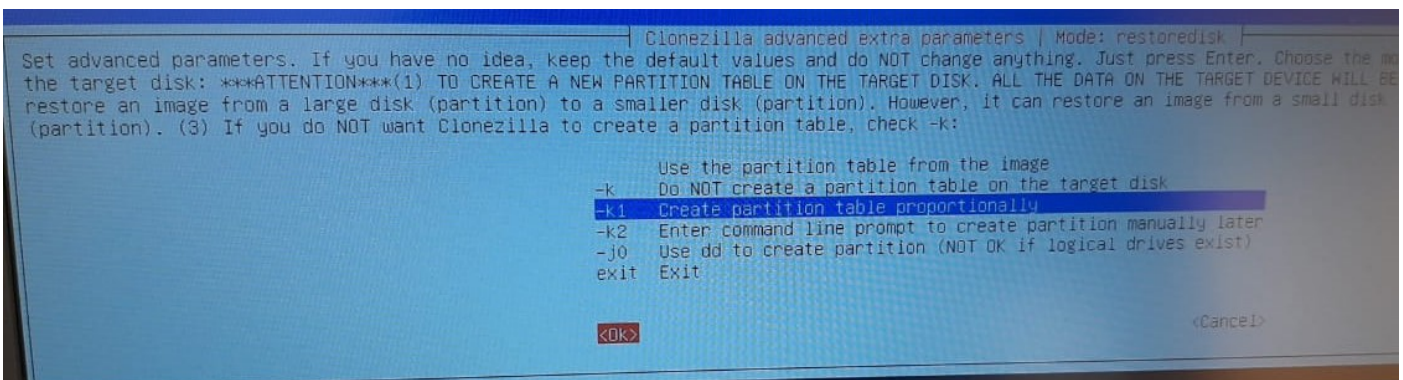


Passo 21: Selecione **Yes** para checar a imagem ou **No** para continuar sem checar.

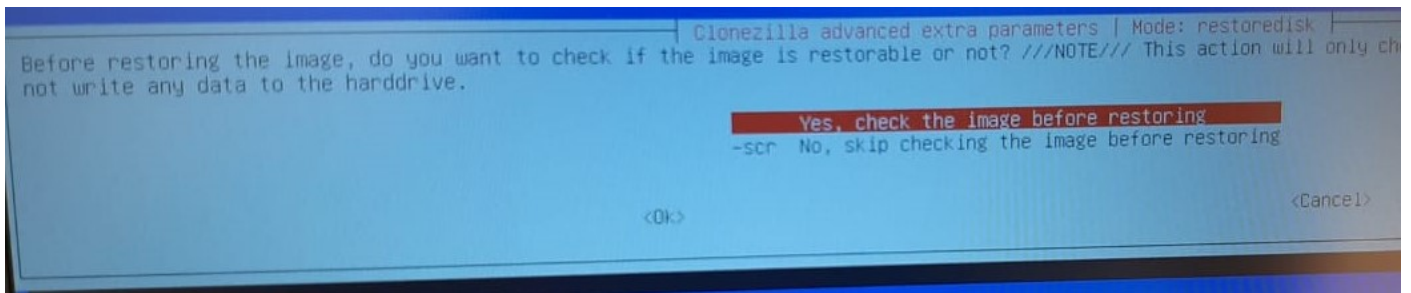


Passo 22: Selecione **-p choose, Ok e Enter.**

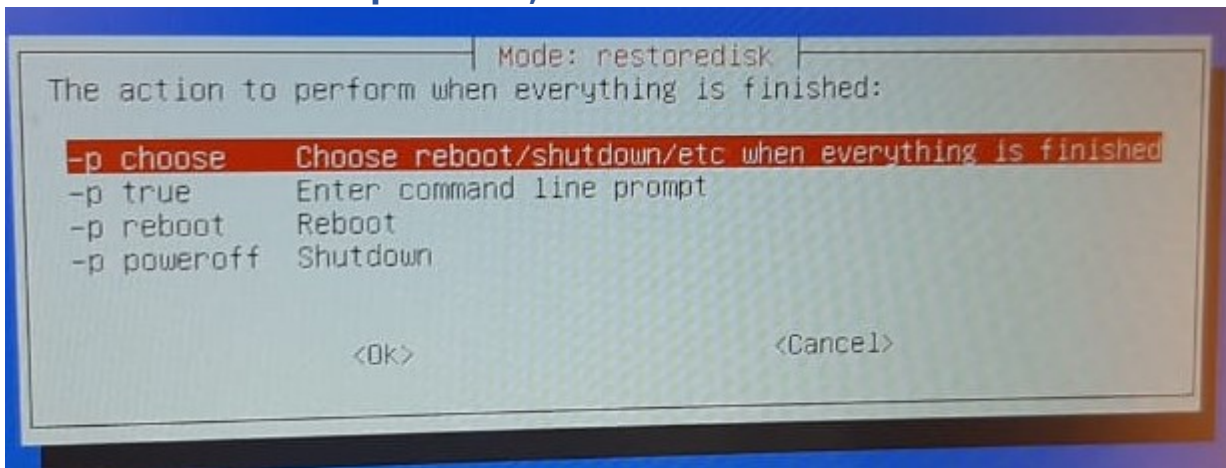


Passo 23: Pressione **Enter** novamente:

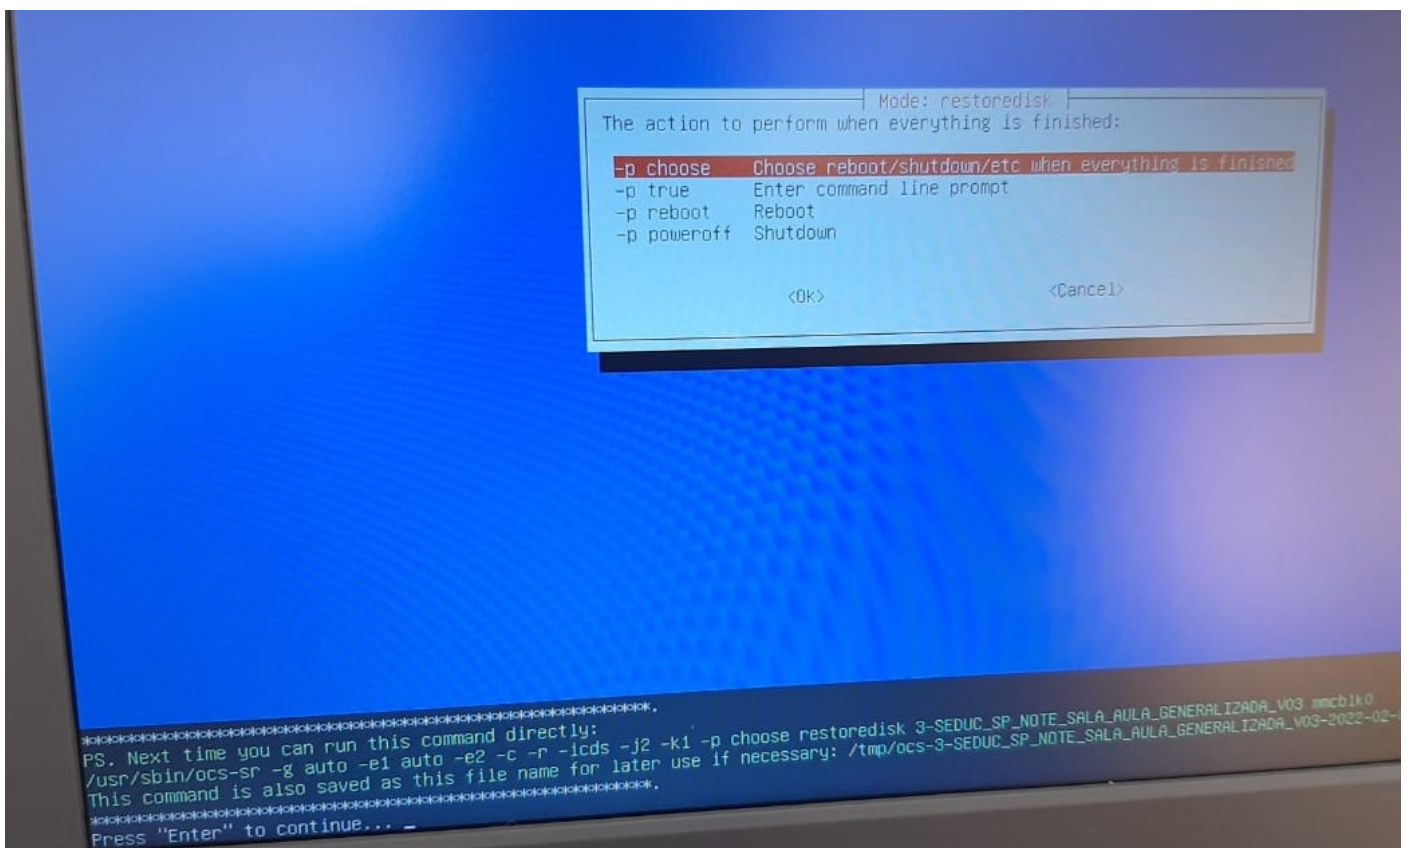

Passo 24: Irá começar a instalação, isso pode demorar em média 10 minutos:

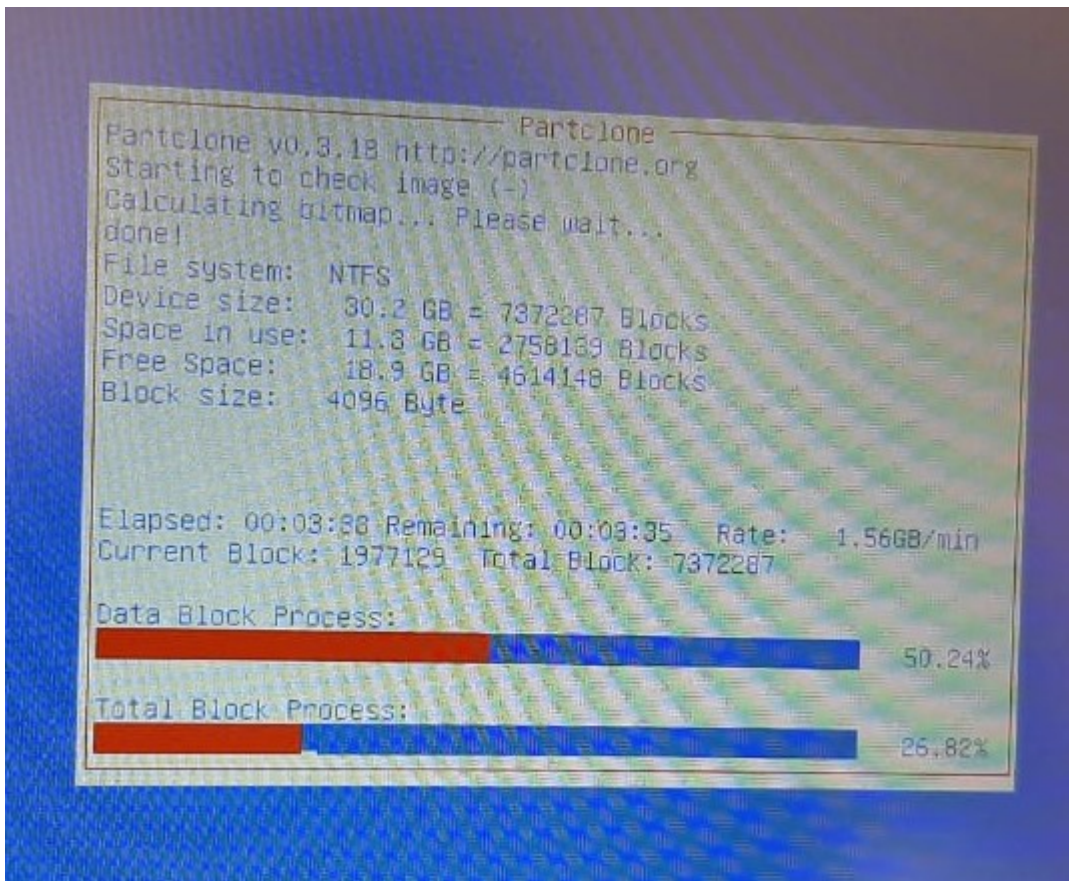

Passo 25: Pressione **y** e **Enter** uma vez e pressione **y** e **Enter** novamente:

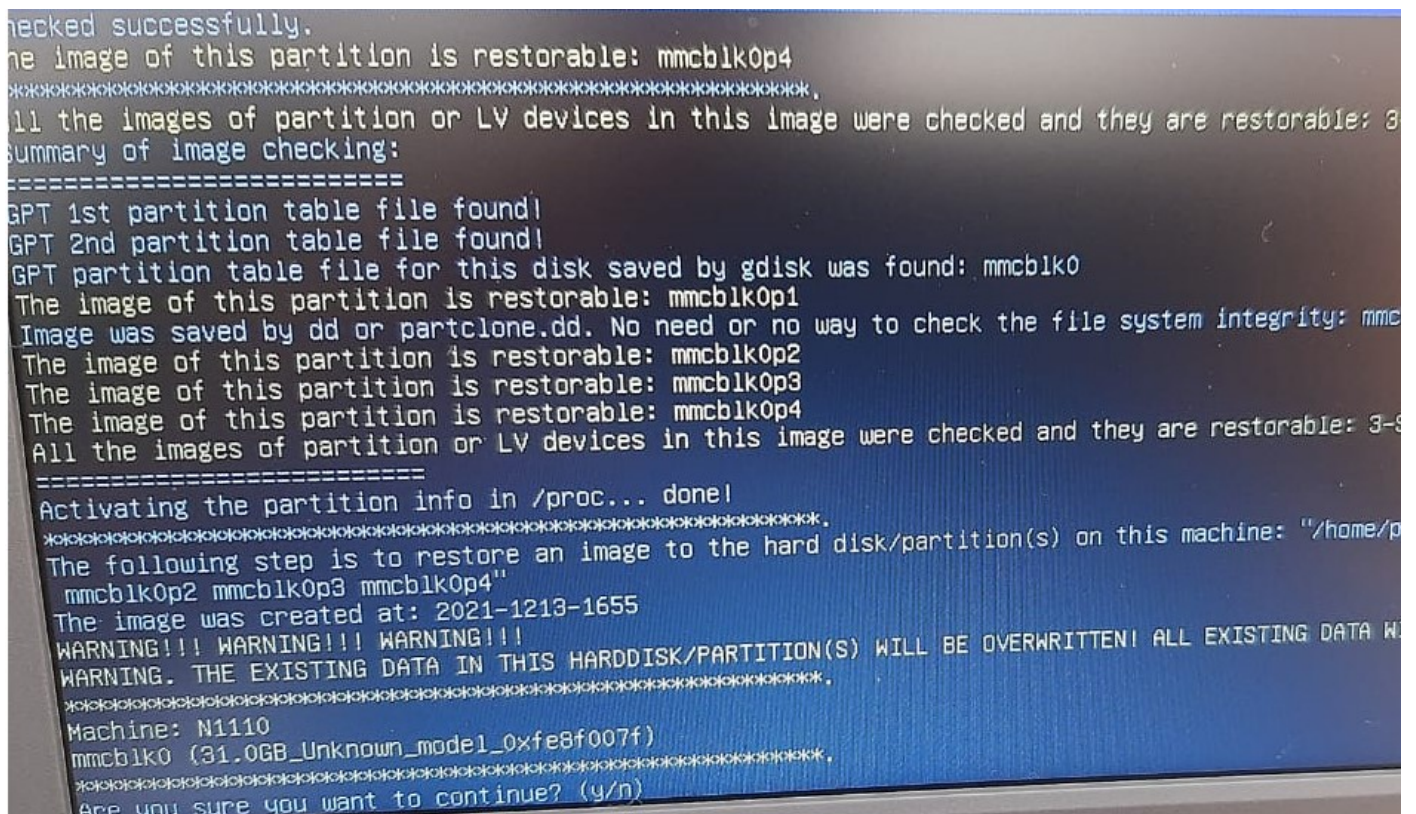

Passo 26: Pressione Enter:

```
Skip updating syslinux on that.
Device /dev/mmcblk0p3 is not a FAT partition.
Skip updating syslinux on that.
Device /dev/mmcblk0p4 is not a FAT partition.
Skip updating syslinux on that.
*****
Running: ocs-install-grub -p "mmcblk0p1 mmcblk0p2 mmcblk0p3 mmcblk0p4" "auto"
The grub directory is NOT found. Maybe it does not exist (so other boot manager exists) or the file system is not supported in the
*****
Running: ocs-update-initrd -p "mmcblk0p1 mmcblk0p2 mmcblk0p3 mmcblk0p4" "auto"
The boot and grub directory was NOT found. Maybe it does not exist (so other boot manager exists) or the file system is not supported
*****
Running: run_ntfsrelloc_part -p "mmcblk0p1 mmcblk0p2 mmcblk0p3 mmcblk0p4" "auto"
The NTFS boot partition was not found or not among the restored partition(s). Skip running partclone.ntfsfixboot.
*****
Running: update-efi-nvram-boot-entry -r /home/partimag/3-SEDUC_SP_NOTE_SALA_AULA_GENERALIZADA_V03/efi-nvram.dat -f /tmp/efi_info.I
Updating boot entry of EFI NVRAM...
EFI system partition: /dev/mmcblk0p1
Trying to clean unused uEFI boot entry if it exists...
Found Boot file /EFI/MICROSOFT/BOOT/BOOTMGFW.EFI in partition /dev/mmcblk0p1.
EFI system partition UUID e53c6981-e4cd-42b3-8466-05c6877acd01 in EFI NVRAM matches the one on partition /dev/mmcblk0p1.
No need to update the boot entry of EFI NVRAM.
*****
End of restoreparts job for image 3-SEDUC_SP_NOTE_SALA_AULA_GENERALIZADA_V03.
End of restoredisk job for image 3-SEDUC_SP_NOTE_SALA_AULA_GENERALIZADA_V03.
*****
Checking if udevd rules have to be restored...
This program is not started by Clonezilla server, so skip notifying it the job is done.
Finished!
The mounted bitlocker device was not found. Skip unmounting it.
Now syncing - flush filesystem buffers...
Ending /usr/sbin/ocs-sr at 2022-02-09 15:54:07 UTC...
*****
If you want to use Clonezilla again:
(1) Stay in this console (console 1), enter command line prompt
(2) Run command "exit" or "logout"
*****
When everything is done, remember to use 'poweroff', 'reboot' or follow the menu to do a normal poweroff/reboot procedure. Otherwise if
writable device (such as USB flash drive), and it's mounted, poweroff/reboot in abnormal procedure might make it FAIL to boot next time
*****
Press "Enter" to continue...
```

Passo 27: Escolha **poweroff** para desligar, retire o Pen Drive, ligue o Netbook e faça as configurações iniciais:

```
Choose mode
Now you can choose to:

poweroff Poweroff
reboot Reboot
cmd Enter command line prompt
rerun1 Start over (image repository /home/partimag, if mounted, will be umounted)
rerun2 Start over (keep_image_repository /home/partimag_mounted)
rerun3 Start over (Remount_subdir_in_medium_of_current_repository): /dev/sda1

<Ok>
```